

F16. 1.

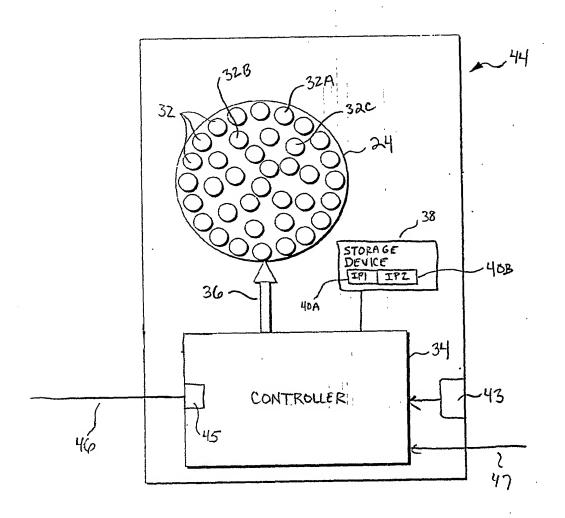


Fig. 2


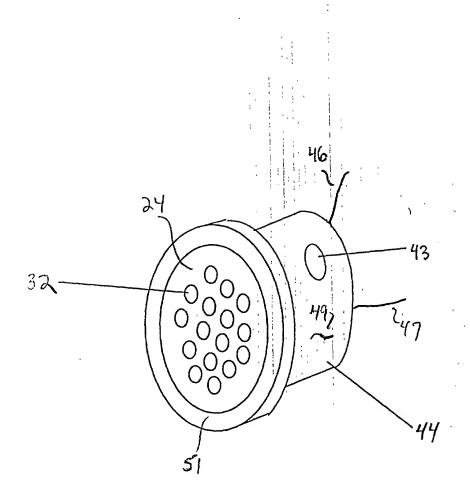


FIG.3

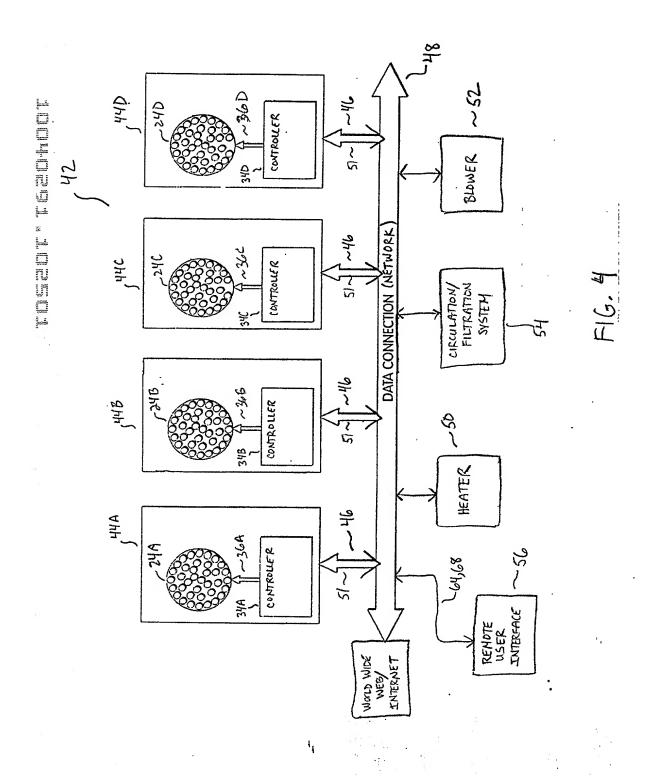

Docket No.: C01104/70088 RFG Title: Methods and Apparatus for Remotely Controlled Illumination of λ Liquids 35 A 360 £. 8 8 CONTROLLER CONTROLLER D CONTROLLER B 340 CONTROUTE A 344 HeA! 0 138 = 140A SELECT CONTROLLER 0 工 I 0 CENTRAL Σ DATE 1367 0 Σ 9/10

.

The second of th	To the second se	A CONTRACTOR OF THE PROPERTY O
CONTROUER	MODE (M)	OPTION (O)
A	DATA	LOGIC HIGH
B	DATA	LOGIC LOW
C	LOGIC HIGH	DATA
D	LOGIC LOW	DATA

F16. 4B

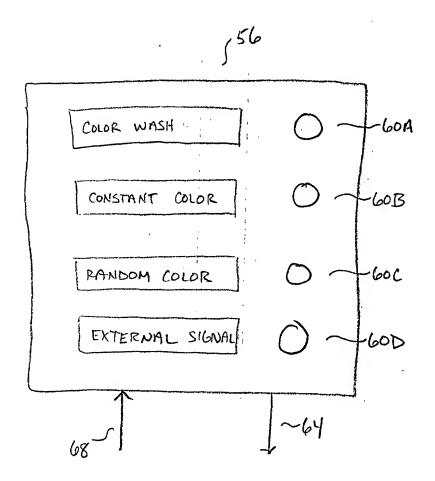


FIG. 5

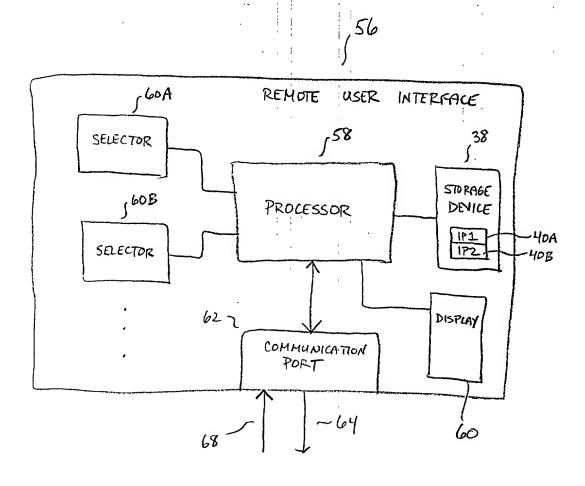


FIG. 6

! iquids

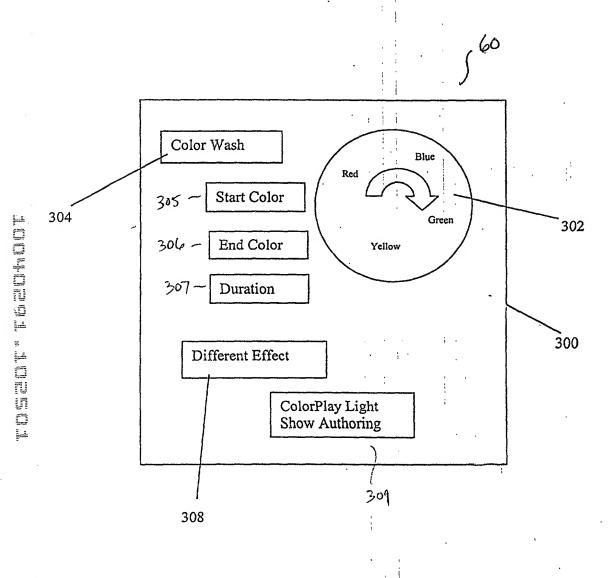


FIG. 7


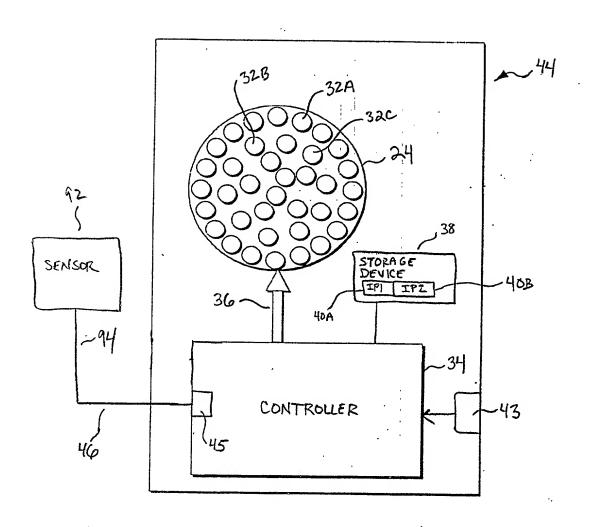


Fig. 8

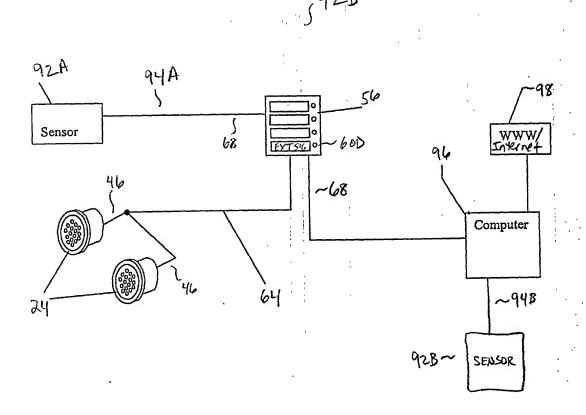

F16.9

Ŀauids

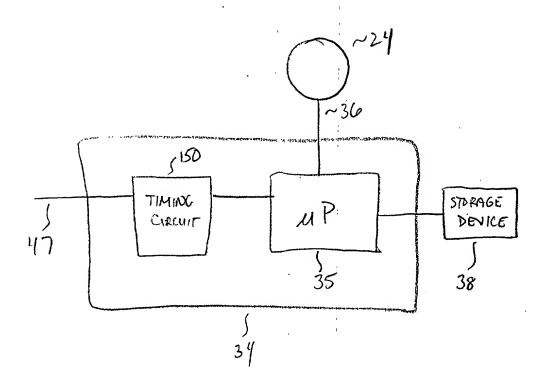
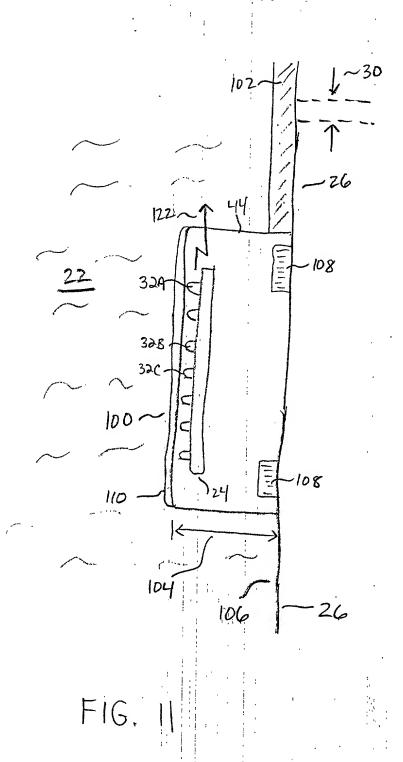
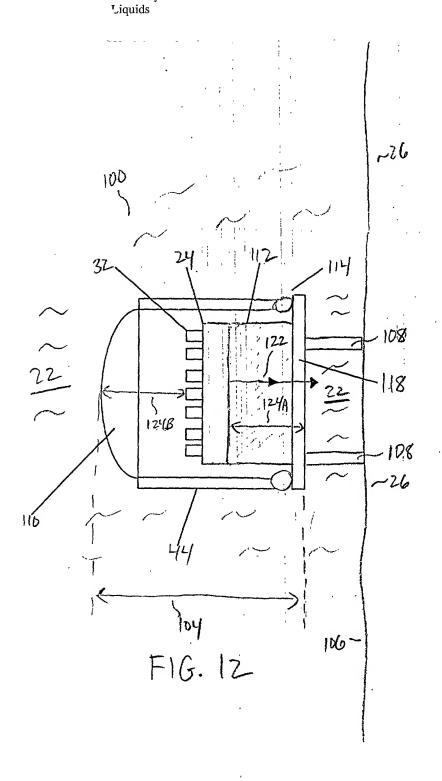


FIG. 10










FIG 13




FIG. 14



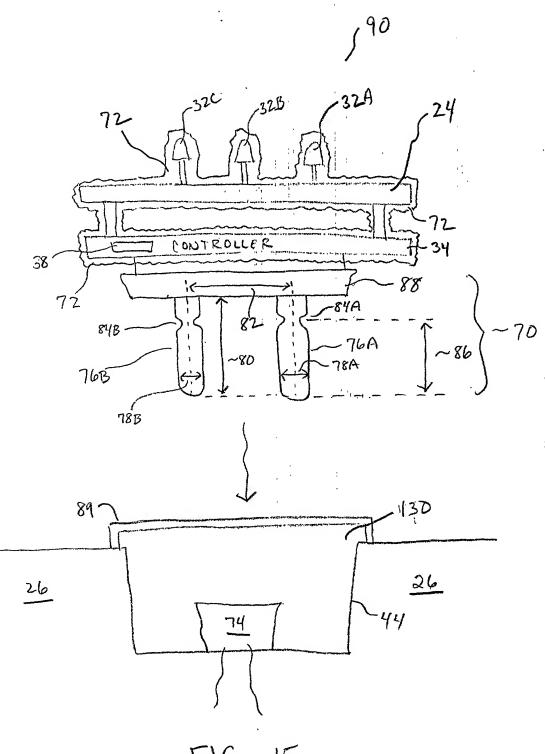



FIG. 15



16 A F16. STRAIGHT KNURL 89-.005 .020 .100 115 87 588 .836 .848 .878 .891 1.046 : 84 78 L Ø.090

FIG. 16B

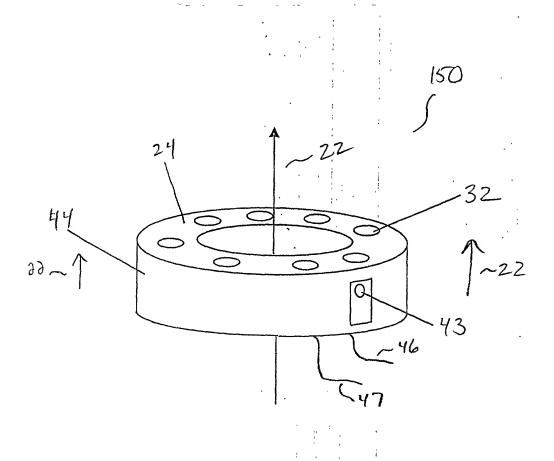

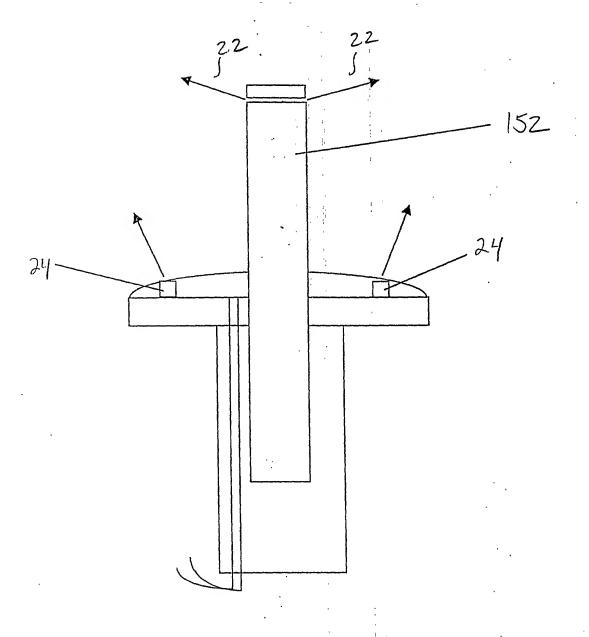

F16. 18

